

MEMPHIS WITH DENVER E-RIBBON BASIC™



3 sizes

SPECIFICATIONS

Standard sizes:	LxHxD 850x400x350mm / DB 720 LxHxD 1050x400x350mm / DB 920 LxHxD 1250x400x350mm / DB 1120
Casing standard:	Black powder coated steel Brushed stainless steel
Casing other finish on request:	White / polished stainless steel / polished copper / brushed copper / polished brass / brushed brass
Top-plate standard:	Black powder coated top-plate
Top-plate other finish:	Only on request
Flametray:	Aluminium
Standard glass:	One 80mm high tempered diamond clear glass, 6mm
Weight:	Depending on material
Fuel:	Use bioethanol at 96,5 - 97,5%
Power supply:	220V - 240V, 50 Hz

FEATURES

- e-Ribbon™ technology
- Safety Sensors / Safety Chamber
- Fuel Level Indicator / Flame Level Indicator
- Remote control
- Bluetooth / App
- 6 flame levels (1-5 + ECO-Wave)
- No chimney required - no smoke, ash or soot

BIOETHANOL


For use and information about bioethanol, please visit our website decoflame.com.
(Please be aware that bioethanol is essential to a proper use and guarantee of your product).

Memphis is a built-in bio fireplace with a Denver e-Ribbon Basic burner. With its simple and open design, there is the possibility of exciting interior design solutions for both the private and commercial spaces.

The back plate is intended to shield the wall from the heat. Available in brushed stainless steel or black powder coated aluminum, it adds a distinguished design detail.

Denver Basic Burner is a simplified, automatic burner available in three dimensions 720mm / 920mm / 1120mm. It is equipped with various safety features for an effortless every day use. The 6mm hardened diamond-cleared glass protects the flames against drafts and keeps them lively.

FINISH STANDARD ON REQUEST


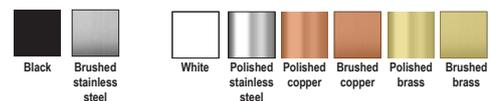


FINISH TOP-PLATE BURNER STANDARD




DENVER e-RIBBON BASIC BURNER:

	720mm	920mm	1120mm
Flametray size	500mm	700mm	900mm
Capacity	4L	5,8L	7,2L
Fuel consumption	0,3 - 0,6 l/h	0,4 - 0,8 l/h	0,6 - 1 l/h
Burning time	7 - 20h	7,5 - 20,8h	7,3 - 20h
Heat output	1,2 - 3,2 kWh	1,6 - 4,3 kWh	2,1 - 5,7 kWh
Net weight	19,5kg	22kg	26kg
Minimum room size	64m ³	89m ³	115m ³

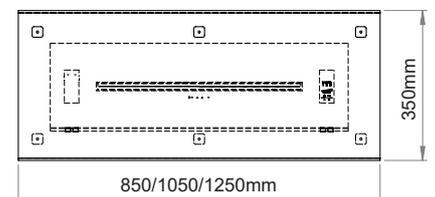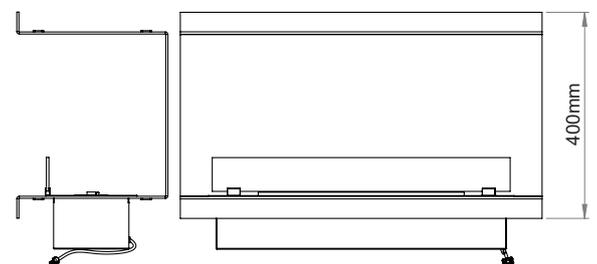

DENVER E-RIBBON BASIC BURNER

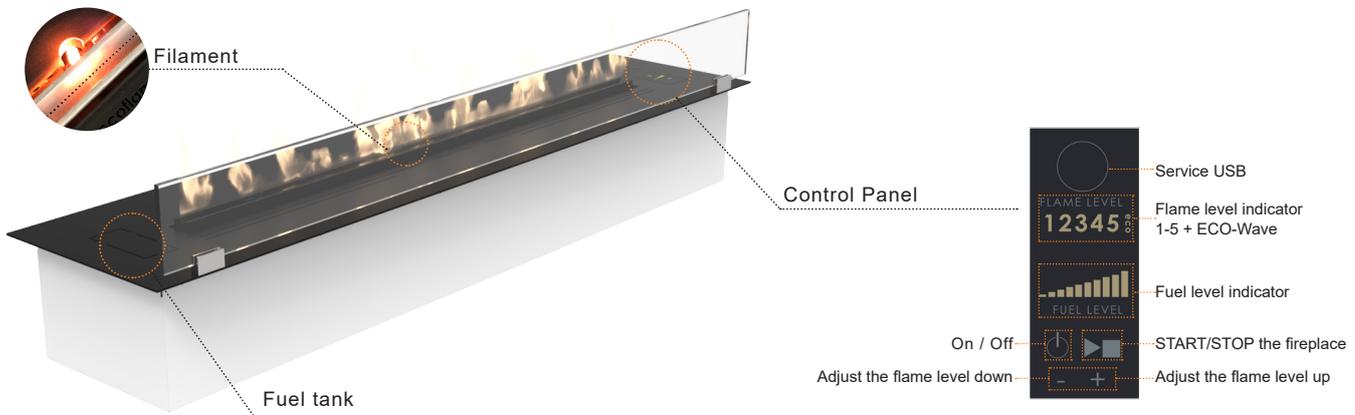

Operating:

Step 1	Turn on the electronics of your Denver e-Ribbon Basic™ by pressing the  button.
Step 2	Fill in the right amount of bioethanol in the fuel tank by verifying the level on the fuel level indicator.
Step 3	To ignition the fireplace. Press the  button on the control panel. After about 3 minutes, the first flames will appear around the centre of the flame tray.
Step 4	When the filament is no longer red (approx. 10 min) it is possible to adjust the flames.
Step 5	To switch off the fire at any time – also during the warming-up phase – press the  button on the control panel. The flames will disappear within a few minutes.



Use the supplied remote control or download the Decoflame App to your mobile device for controlling the biofireplace.

Installation of Decoflame App to the Denver e-Ribbon Basic burner



App Store



Google play

Model:	Denver Basic 720 - black	
Dimensions:	720x215x125mm - Flame Tray 500	
Power Supply:	220/240V - 50Hz must be earthed	
Serial Number:	7200005.16.V1.001	
Thermal Output:	max 2.9 kW	
Fuel Type:	bioethanol 96%	
Room Volume:	min. 58 m ³	
Radio Frequency:	433.92 MHz	
Bluetooth Code:	0001	
Manufacturer:	Decoflame ApS - Made in Denmark	



1. Download and install the Decoflame App corresponding to your smart device's operating system. For more information go to: decoflame.com.

2. In order to pair your fireplace with your smart device, start the fireplace by pressing the 'ON' button. Start the App and choose your fireplace. Insert the code from YOUR rating plate, like the one highlighted above.

3. Once your device is paired, the fireplace should be visible on the app. You are now able to change the name of the fireplace. **Note:** You are able to pair more than one fireplace like described in the step nr. 2 and give them different names.



4. Once you have selected your fireplace, you can turn it on by pressing 'START'. If the fireplace has already been turned on using the control panel, you can now monitor the fuel level and the consumption.



5. For the 'Turn Off Timer' press the clock icon in the lower right corner. To adjust the remaining time, slide the dot to the left and right and select 'SET TIMER'. The remaining burning time can be changed by repeating the above mentioned steps. To cancel the timer select 'CLEAR TIMER'.



6. For adjusting the flame intensity, select the desired level on the left side of the screen. (1-lowest, 6-highest) Should there not be enough fuel for the selected burning time - the fireplace will shut down automatically. Select 'STOP' to turn off the fireplace.